




## SELF-SUPPORTING BOW TYPE DROP CABLE

**AR-2PEUFS-1F-G657A1/2**

### DESCRIPTION

The optical fiber unit is positioned in the centre. Two parallel Fiber Reinforced Plastics (FRP) are placed at the two sides. A steel wire as the additional strength member is also applied. Then, the cable is completed with a black or color LSZH sheath.

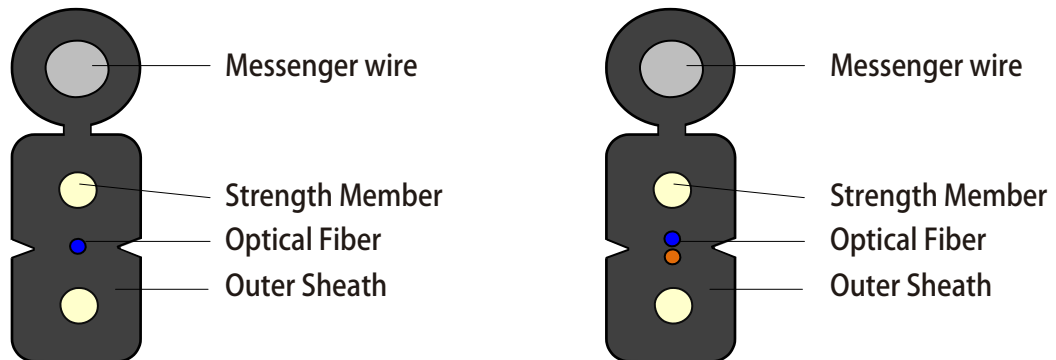

## APPLICATION

- Internal FTTH applications horizontal and riser, especially suitable for the last leg in FTTH systems.

## CHARACTERISTICS

- Special low-bend-sensitivity fiber provides high bandwidth and excellent communication transmission property.
- Two parallel FRP strength members ensure good performance of crush resistance to protect the fiber.
- Steel wire as the additional strength member ensures good performance of tensile strength.
- Simple structure, light weight and high practicability.
- Novel flute design, easily strip and splice, simplify the installation and maintenance.

## OPTICAL FIBER IN CABLE (ITU-G.657A1/2)

Optical properties of the SM fiber are achieved through a germanium doped silica based core with a pure silica cladding which meets ITU-T G657A1/2, UV curable acrylate protective coating is applied over the glass cladding to provide the necessary maximum fiber lifetime.

Geometrical and optical mechanical characteristics of fiber in cable as the following table:

Category	Items	Unit	Description	
			Before cabled	After cabled
Optical Characteristics	Attenuation at 1310 nm	dB/km	≤ 0.35	≤0.40
	Attenuation at 1383 nm	dB/km	≤ 0.35	≤0.40
	Attenuation at 1550 nm	dB/km	≤ 0.21	≤0.30
	Attenuation at 1625 nm	dB/km	≤ 0.23	≤0.30
	Zero dispersion wavelength	nm	1300~1324	
	Zero dispersion slope	ps/(nm <sup>2</sup> ·km)	≤ 0.092	
	Cable cut-off wavelength λ <sub>cc</sub>	nm	≤ 1260	
	Mode field diameter (MFD) at 1310 nm	μm	8.4~9.2	
	Mode field diameter (MFD) at 1550 nm	μm	9.3~10.3	
	Group Index of Refraction (Typical) at 1310 nm	/	1.466	
	Group Index of Refraction (Typical) at 1550 nm	/	1.467	
			<b>A1</b>	<b>A2</b>
	Macro-bend loss (1 turn, 7.5mm radius) at 1550nm	dB	-	≤ 0.2
	Macro-bend loss (1 turn, 10mm radius) at 1550nm	dB	≤ 0.75	≤ 0.1
Macro-bend loss (1 turn, 15mm radius) at 1550nm	dB	≤ 0.25	≤ 0.3	
Geometrical Characteristics	Cladding diameter	μm	125 ± 0.7	
	Cladding non-circularity	%	≤ 0.7	
	Coating diameter	μm	245 ± 5	
	Coating/cladding concentricity error	μm	≤ 12.0	
	Coating non-circularity	%	≤ 6.0	
	Core/cladding concentricity error	μm	≤ 0.5	

## CABLE DIMENSIONS AND CONSTRUCTIONS

Items	Descriptions		
	Optical Fiber	Fiber count	1
Color		Blue	Blue / Orange

Items		Descriptions	
		A1	A2
Strength Member	Material	KFRP(Kevlar fiber reinforced plastics)	GFRP(Glass fiber reinforced plastics)
Messenger wire	Diameter	0.5 mm	0.5 mm
	Material	Galvanized steel wire with EAA	Steel wire
	Diameter	1.2 mm	1.2 mm
Outer Sheath	Material	Low friction LSZH	Low friction LSZH
	Thickness	≥0.4 mm	≥0.4 mm
	Color	Black	Black
Cable Diameter		5.3(±0.2)*2.0(±0.2)mm	5.3(±0.2)*2.0(±0.2)mm
Cable Weight	Net Weight	Approx. 22kg/km	Approx. 22kg/km

## MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Items	Test Method	Descriptions	
Tensile performance	IEC 60794-1-2 Method E1	short-term	600N
		long-term	300N
Crush Resistance	IEC 60794-1-2 Method E3	short-term	2200N/10cm
		long-term	1000N/10cm
Impact Resistance	IEC 60794-1-2 Method E4	No obvious change after test	
Repeat Bending	IEC 60794-1-2 Method E6		
Torsion	IEC 60794-1-2 Method E7		
Cable Bend	IEC 60794-1-2 Method E11		
Temperature Range	IEC 60794-1-2 Method F1	-40°C~+70°C	
Bending Radius	Static	15mm	
	Dynamic	30mm	

## PACKING

Cables are coiled on wooden or plastic drum. During transportation, right tools should be used to avoid damaging the package and to handle with ease.

Cables should be protected from moisture; kept away from high temperature and fire sparks; protected from over bending and crushing; protected from mechanical stress and damage.

## MARKING

Unless otherwise specified, the cable sheath marking shall be as follows:

- Color: White or Black
- Contents: Cable manufacturer or owner, the year of manufacture, the type of cable, length marking
- Interval: 1m

## DELIVERY LENGTH

**A1:** Standard delivery length is 0.5km/drum or 1km/drum. Other length available on request.

**A2:** Standard delivery length is 1km/drum or 2km/drum. Other length available on request.